

NOMA® PARKETT ADHESIVE & FIX



Adhesive tape covered with aluminium for underlay.




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact
the respective subsidiary in your country.
Visit www.nmc.eu/contact

www.nmc.eu



NOMA[®] PARKETT ADHESIVE & FIX

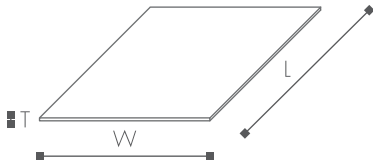

- Thickness (nominal): $\pm 0,05$ mm
- Base of the glue: acrylate, white
- Adhesive strength: 6 N / 25 mm
- Breaking load: 100 N / 25 mm
- Elongation at break: 90 %
- Water vapor permeability: $0,9$ g/m² /24h according to DIN 53122 at 23 °C
- Temperature resistance: - 20 °C bis + 100 °C
- Weathering resistance : good
- UV resistance: good

Range of products

Type	W mm	Length m	Packaging unit
Adhesive	50	50	24 pcs/ctn