

NOMA® PARKETT EXPERT ORANGE ROLL 2,2mm



High insulating extruded polystyrene foam, elasticised, with a special moisture-bloking foil, overlapping edge and selfadhesive trip. Ideally suited for laying click system laminate flooring due to the smooth upper surface, as well as cork and floating parquet floors, in areas with normal traffic.

Product features

- The elastic, efficient insulator
- Protects against rising damp
- Reduces the impact sound
- For indoor use only
- Simple and easy to install




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact the respective subsidiary in your country. Visit www.nmc.eu/contact

www.nmc.eu



NOMA® PARKETT EXPERT ORANGE ROLL 2,2mm

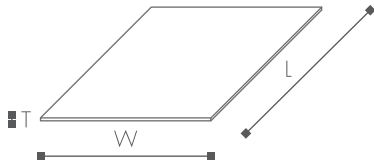

- Thickness: 2,2 mm \pm 0,3 mm
- Impact sound reduction ΔL_w : 21 dB (with laminates) according to DIN EN ISO 140-8 / 717-2
- Walking sound improvement: 21% according to IHD site norm
- Thermal resistance R at 40°C: \pm 0,06 m²K/W according to DIN EN ISO 12667
- Thermal conductivity at 40°C: \pm 0,0339 W/m K
- Water permeability value (Sd value): > 100 m according to DIN 52615 / DIN EN 12086
- Compression strength: \pm 10,9 t/m² according to ISO 844 (0,5 mm)
- Leveling of floor irregularities: \leq 1,5 mm
- Density: 50 kg/m³ \pm 3 kg
- Surface mass (approx. values): \pm 110 g/m²
- Application temperature range: -40 °C to +70 °C
- Fire classification: E/Efl according to EN 13501-1
- Compatibility with underfloor heating (warm water system): yes
- Laminates up to 9 mm. Take producer information into account.

Installation tips :

The floor must be clean, dry and flat. Unroll the first strip on the floor (polystyrene side downwards and gold side upwards) and cut it to the size required using a cutter. Unroll on the floor and cut the second strip, which you lay edge-to-edge against the first. Unfold the overlapping edge and lay it edge-to-edge against the first, join the edges by means of the integrated adhesive tape. Please take care that there is a perfect bonding between the adhesive and the product in order to guarantee the moisture-blocking effect. To guarantee a good result, it is essential to attach the layers to each other, using NOMA® PARKETT ADHESIVE & FIX (adhesive tape covered with aluminium for underlay). Where it meets the wall, stick part of the adhesive tape on the NOMA® PARKETT EXPERT ORANGE ROLL and the other against the adjacent wall. Repeat steps and fit the floor. Our recommendation: Avoid walking on the underlayer. In case of underfloor heating system, consider the total thermal resistance (value of the underlayer + flooring).

Range of products

Type	W m	L m	T mm	Packaging unit
2,2 mm	1	15	2,2	18x15 m ² /palet