

NOMA® PARKETT GOLD RAPID 1,6mm



Expanded polystyrene foam, covered with a special vapour-trap film. Ideally suited for laying both laminate floors with the click system because of the smooth surface, and for cork and floating parquet floors in areas of normal traffic.

Product features

- Reduces the impact sound and improves walking comfort
- Odour- and rot-free
- For indoor use only
- Simply and quick to fit
- Recommended for underfloor heating systems




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact the respective subsidiary in your country. Visit www.nmc.eu/contact

www.nmc.eu



NOMA® PARKETT GOLD RAPID 1,6mm

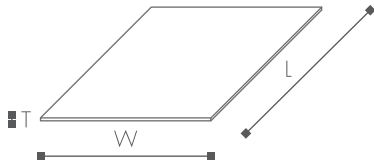

- Thickness: 1,6 mm \pm 0,3 mm
- Impact sound reduction ΔL_w : 20 dB (for laminates) according to DIN EN ISO 140-8 / 717-2
- Walking sound improvement: 19% according to IHD site norm
- Thermal resistance R at 40°C: \pm 0,05 m²K/W according to DIN EN ISO 12667
- Thermal conductivity at 40°C: \pm 0,0323 W/m K
- Water permeability value (Sd value): > 100 m according to EN ISO 12572:2002
- Compression strength: \pm 6,5 t/m² according to ISO 844 (0,5 mm)
- Leveling of floor irregularities: \leq 1 mm
- Density: 19 kg/m³ \pm 3 kg
- Surface mass (approx. values): \pm 30,4 g/m²
- Application temperature range: -40 °C to +70 °C
- Fire classification: E/Efl according to DIN EN 13501-1
- Compatibility with underfloor heating (warm water system): optimal

Laying instructions:

- The floor must be clean, dry and flat. Unroll the first strip on the floor (polystyrene side downwards and gold side upwards) and cut it to the size required using a cutter. Unroll on the floor and cut the second strip, which you lay edge-to-edge against the first.
- To guarantee a good result, it is essential to attach the layers to each other, using NOMA®PARKETT ADHESIVE & FIX (adhesive tape covered with aluminium for underlay). Where it meets the wall, stick part of the adhesive tape on the NOMA®PARKETT GOLD RAPID and the other against the adjacent wall. Repeat steps and then fit the floor.

Range of products

Type	W m	L m	T mm	Packaging unit
1,6 mm	1	15	1,6	27x15 m ² /palet
1,6 mm	1	15	1,6	6x15 m ² /ctn