

NOMA® PARKETT ORANGE RAPID 2,2mm



High insulating extruded polystyrene foam, elasticised, with a special moisture-bloking foil, overlapping edge and selfadhesive trip. Ideally suited for laying click system laminate flooring due to the smooth upper surface, as well as cork and floating parquet floors, in areas with normal traffic.

Product features

- The elastic, efficient insulator
- Protects against rising damp
- Reduces the impact sound
- For indoor use only
- Simple and easy to install through zig-zag format




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact the respective subsidiary in your country. Visit www.nmc.eu/contact

www.nmc.eu



NOMA® PARKETT ORANGE RAPID 2,2mm

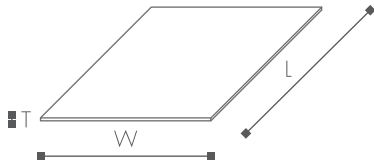

- Thickness: 2,2 mm \pm 0,3 mm
- Impact sound reduction ΔL_w : 21 dB (with laminates) according to DIN EN ISO 140-8 / 717-2
- Walking sound improvement: 21% according to IHD site norm
- Thermal resistance R at 40°C: \pm 0,06 m²K/W according to DIN EN ISO 12667
- Thermal conductivity at 40°C: \pm 0,0339 W/mK
- Water permeability value (Sd value): > 100 m according to DIN 52615 / DIN EN 12086
- Compression strength: \pm 10,9 t/m² according to ISO 844 (0,5 mm)
- Leveling of floor irregularities: \leq 1,5 mm
- Density: 50 kg/m³ \pm 3 kg
- Surface mass (approx. values): \pm 110 g/m²
- Application temperature range: -40 °C to +70 °C
- Fire classification: E/Efl according to DIN EN 13501-1
- Compatibility with underfloor heating (warm water system): yes
- Laminates up to 9 mm. Take producer information into account.

Verlegehinweise :

- Place an initial layer of NOMA®PARKETT ORANGE RAPID on the floor (golden side face up) and trim to the desired size with a cutting tool.
- Unfold the edges and lay on the next length, then join the edges with the integrated adhesive tape.
- Cut off the surplus on the ends after laying the laminate.

Our recommendations: Avoid walking on the underlay. In the case of underfloor heating (hot water system), be aware of the heat transmission resistance of the final floor. As a rule, NOMA®PARKETT ORANGE RAPID can be fitted with laminate floors up to max. 11mm and parquet up to max. 14mm.

Range of products

Type	L m	T mm		Packaging unit
2,2 mm	1	12	2,2	27x12 m ² /palet
2,2 mm	1	12	2,2	6x12 m ² /ctn