


NOMA® PARKETT PRO SILVER ROLL 3mm

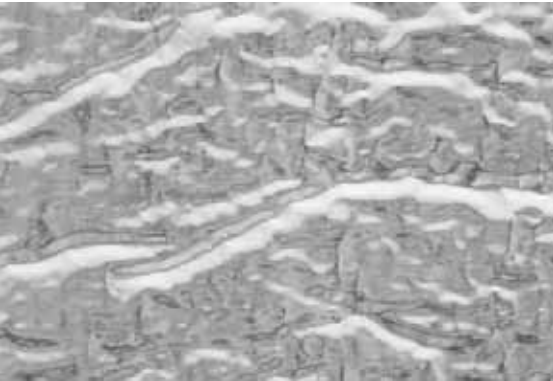

Polyethylene foam with silver coloured, metallised vapour barrier sheet, overlapping and selfadhesive strip. Ideally suited for floating parquette and laminate floors.

Product features

- Underlayer in professional quality acc. to DTU 51.11
- PP-sheet with 20 μ thickness, with a performance of a PE-sheet of 100 μ . Guarantees outstanding vapour barrier properties.
- Acc. to noise standard RA 2000; efficient impact noise reduction und good thermal resistance.
- Easy to install due to overlapping and selfadhesive strip.




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact the respective subsidiary in your contry. Visit www.nmc.eu/contact

www.nmc.eu



NOMA® PARKETT PRO SILVER ROLL 3mm

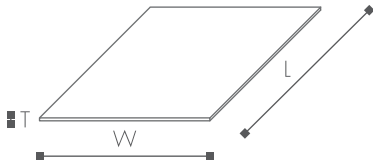

- Thickness: ± 3 mm acc. to DIN EN ISO 2286-3
- Impact sound reduction ΔL_w :
19 dB (with laminate) acc. to DIN EN ISO 140-8 / 717-2
- Thermal resistance R: $\pm 0,10$ m²K/W acc. to ISO 8301
- Thermal conductivity at 10°C: $\pm 0,029$ W/mK
- Water permeability value (Sd value):
> 97 m acc. to DIN 52615 / DIN EN 12086
- Compression strength: $\pm 0,611$ t/m² acc. to ISO 3386-1
- Leveling of floor irregularities: ≤ 2 mm
- Density: ± 20 kg/m³ acc. to EN ISO 845
- Surface mass (approx. values): ± 60 g/m²
- Application temperature range: -40 °C to +70 °C
- Fire classification: B3 according to DIN 4102-1
- Compatibility with underfloor heating (warm water system): no

Installation :

Correct all unevennesses of the floor bigger than 2 mm. Place a first strip (aluminium side upwards) and cut it to the size required using a cutter. Unfold the overlapping edge and lay it edge-to-edge against the first, join the edges by means of the integrated adhesive tape. Cut the surplus material at the ends after installation of the laminate floor.

Range of products

Type	W m	L m	T mm	Packaging unit
3 mm	1	15	3	20x15 m ² /bag