

NOMA® PARKETT UNIVERSAL BAG 0,10mm



Vapour barrier sheet made of polyethylene. NOMA®PARKETT UNIVERSAL BAG suited for laying click system laminate flooring as well as floating parquet floors, especially if there is still humidity in the floor.

Product features

- Protection against arising humidity
- According to DTU 51.11
- 100% recyclable




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact
the respective subsidiary in your country.
Visit www.nmc.eu/contact

www.nmc.eu



NOMA® PARKETT UNIVERSAL BAG 0,10mm

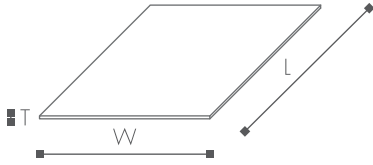

- Thickness (nominal): $\pm 100 \mu\text{m}$
- Water permeability value (Sd value): $> 14\text{m}$
- Density: $\pm 930 \text{ kg/m}^3$
- Surface mass: $\pm 90 \text{ g/m}^2$
- Application temperature range: $-40 \text{ }^\circ\text{C}$ to $+70 \text{ }^\circ\text{C}$
- Fire classification: B2 acc. to DIN 4102

Installation tips :

- Lay out the sheet and pull die edges 15cm upwards the wall.
- Overlap the joints and fix them with water vapour resistant tape (NOMA® PARKETT ADHESIVE & FIX).
- Lay the floor and cut overlapping sheet next to the walls.

Range of products

Type	W m	L m	T mm	Packaging unit
0,1 mm	4	4	0,1	8x16 m ² /ctn