


Airolen® FC

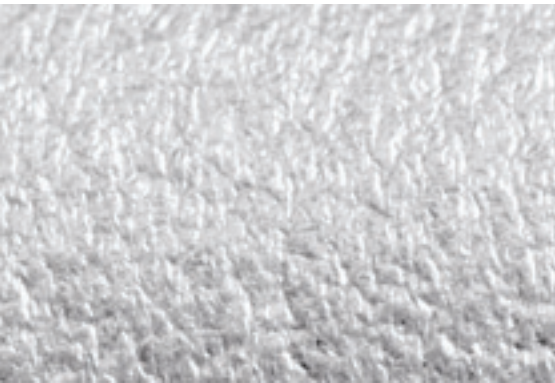

Airolen® FC consists of an age-resistant expanded polyethylene foam with closed cells. The new developed fine cell structure gives excellent compression strength and sound insulation properties. Airolen® FC is used under parquet and laminated flooring in order to reduce impact sound and to contribute to the levelling of the substructure.

Airolen® FC is type approved by SP Technical Institute of Sweden, nbr 0059/08.

Product features

- Fine cell structure gives outstanding physical properties
- Efficient impact noise deadening with an improvement measurement ΔL_w of -19 dB
- Reduction of transmission of footfall and impact noise
- Light, strong and flexible
- Ideally suited for floating parquet and laminate floors
- High resistance to pressure and very good dimensional stability
- Age resistance > 50 years
- 100% recyclable
- Odour and dust free



NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact the respective subsidiary in your country. Visit www.nmc.eu/contact

www.nmc.eu



Airolen[®] FC



- Various thicknesses and physical construction characteristics
- Suitable for use in both old and new buildings
- For floors with or without under-floor heating
- Installation faster and easier on a clean and dry floor
- Simply roll out the underlay across the floor and make sure that the joints are butted tightly together, the joints should be sealed with an adhesive tape

Type	Width mm	Thickness mm	Length	Packaging unit
1200x2	1200	2	15 m	15 m ²
1200x2	1200	2	25 m	25 m ²
1200x2	1200	2	125 m	150 m ²
1200x3	1200	3	12.5 m	15 m ²
1200x3	1200	3	62.5 m	75 m ²
1500x5	1500	5	75 m	112.5 m ²