

# NOMA® PARKETT ECO NATURE ROLL 2mm



The natural, environmentally friendly insulation based on cork. NOMA® PARKETT ECO NATURE ideally suits for an application with floating parquet floors, click system parquet and laminate flooring.

## Product features

- Natural and 100 % recyclable
- Very good thermal resistance on the ground
- Simply and easy to fit
- Compatible with underfloor heating
- Improved walking comfort
- Indoor use only




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact the respective subsidiary in your country. Visit [www.nmc.eu/contact](http://www.nmc.eu/contact)

[www.nmc.eu](http://www.nmc.eu)



# NOMA® PARKETT ECO NATURE ROLL 2mm

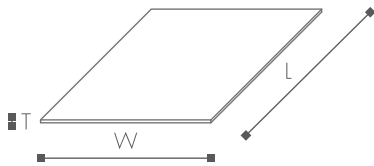

- Thickness:  $\pm 2$  mm
- Impact sound reduction: 17 dB (for laminates) according to DIN EN ISO 140-8
- Walking sound improvement: 6% according to EPLF 021029-1 to 3
- Thermal resistance R at 23°C:  $\pm 0,044$  m<sup>2</sup>K/W
- Thermal conductivity at 23°C:  $\pm 0,046$  W/mK
- Compression strength:  $\pm 6,5$  t/m<sup>2</sup> (0.5mm Compression)
- Leveling of floor irregularities:  $\leq 0,5$  mm
- Density:  $\pm 210$  kg/m<sup>3</sup>
- Surface mass (approx. values):  $\pm 420$  g/m<sup>2</sup>
- Fire classification: B3 according to DIN 4102
- Compatibility with underfloor heating (warm water system): Yes

## Installation tips :

- The floor must be clean, dry and even. If there is any serious dampness, we recommend the additional fitting of a PE vapour-trap film (such as NOMA®PARKETT UNIVERSAL) with a Sd value > 100m.
- Unroll the NOMA®PARKETT ECO NATURE on the floor and join the strips edge to edge.
- Fix the strips with NOMA®PARKETT ADHESIVE & FIX tape to prevent the underlay from slipping.
- Then lay the floating floor or laminate.

## Range of products

Type	W m	L m	T mm	Packaging unit
2 mm	1	10	2	6x10 m <sup>2</sup> /ctn