

# NOMA® PARKETT EXPERT BLACK VINYL 1mm



High-quality all-round underlay made from highly elasticised copolymer

## Product features

- Very good impact sound reducing
- Very good improving of the walk comfort
- Excellent compatibility with underfloor heating
- High compression stability
- Odour-and rot-free
- For indoor use only
- Simply and quick to fit




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

**NMC Deutschland GmbH**  
Weiherhausstrasse 8b - D-64646 Heppenheim  
Tel.: +49 62 52 96 70  
Fax: +49 62 52 96 74 44  
E-Mail: info@nmc.eu

[www.nmc.eu](http://www.nmc.eu)



# NOMA® PARKETT EXPERT BLACK VINYL 1mm

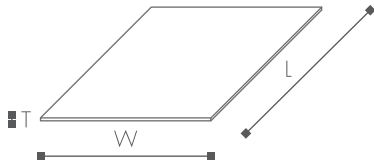

- Thickness: 1 mm  $\pm$  0,3 mm
- Base: highly elasticised copolymer
- Surface mass:  $\pm$  100 g/m<sup>2</sup>
- Density:  $\pm$  100 kg/m<sup>3</sup>
- Surface: 15 m<sup>2</sup>
- Weight of a roll: 1,8 kg
- Thermal resistance R = 0,0216 m<sup>2</sup>K/W
- Compatibility with underfloor heating: yes
- Impact sound reduction  $\Delta L_w$ : 19 dB under Design PVC with floating parquet (DIN/EN/ISO 10140/717)
- Impact sound reduction  $\Delta L_w$ : 22 dB under laminate (DIN/EN/ISO 10140/717)
- Walking sound improvement: 32 % under laminate (IHD-Std W431/DIN 45631)
- Fire classification: E/Efl according to DIN EN 13501-1
- Compression strength: > 12 t/m<sup>2</sup>

## Installation tips:

- The floor should be clean, dry and even. Unroll the first length on the floor and cut it to the size required using a cutter. Roll out a second length on the floor and cut it laying it alongside the first one.
- To guarantee a good result, it is essential to attach the layers to each other using NOMA® PARKETT ADHESIVE & FIX (adhesive tape coated in aluminium for underlay purposes). Where the floor meets the wall, stick part of the adhesive tape to NOMA® PARKETT EXPERT BLACK VINYL and the other to the adjacent wall. Repeat operations and then lay the floor.

## Range of products

Typ	W	L	T	VPE
	m	m	mm	
1 mm	1	15	1 $\pm$ 0,3/0,3	1x15m/Rolle