


NOMA® PARKETT EXPERT GREEN SILVER TILES 4mm

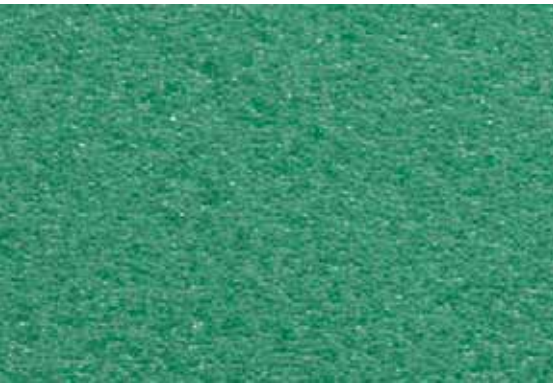

Expanded polystyrene foam, with with a special moisture-bloking foil. Ideally suited for laying both laminate floors with the click system because of the smooth surface, and for cork and floating parquet floors in areas of normal traffic

Product features

- Reduces the impact sound and improves the walking comfort
- Protects against rising damp
- Odour- and rot-free
- For indoor use only
- Simply and quick to fit




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact
the respective subsidiary in your country.
Visit www.nmc.eu/contact

www.nmc.eu



NOMA® PARKETT EXPERT GREEN SILVER TILES 4mm

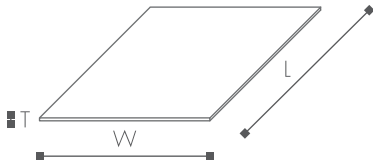

- Thickness: 4 mm \pm 0,5 mm
- Impact sound reduction ΔL_w : 20 dB according to DIN EN ISO 140-8/ 717-2
- Walking sound improvement: 19% according to IHD site norm
- Thermal resistance R at 40°C: 0,11 m²K/W according to DIN EN ISO 12667
- Thermal conductivity at 40°C: 0,0371 W/mK
- Water permeability value (Sd value): > 100 m according to EN ISO 12572:2002
- Compression strength: \pm 10,5 t/m²
- Leveling of floor irregularities: \leq 2,5 mm
- Density: 35 kg/m³ \pm 3 kg
- Surface mass (approx. values): \pm 140 g/m²
- Application temperature range: -40 °C to +70 °C
- Fire classification: E/Efl according to DIN EN 13501-1
- Compatibility with underfloor heating (warm water system): no

Installation tips:

- The floor must be clean, dry and even. Lay the sheets of NOMA®PARKETT EXPERT GREEN SILVER TILES edge to edge with the polyethylene side downwards.
- Cut the sheets to the desired size using a cutter.
- To guarantee a good result, it is essential to attach the layers to each other, using NOMA®PARKETT ADHESIVE & FIX (adhesive tape covered with aluminium for underlay).
- Repeat steps and then fit the floor.

Range of products

Type	W	L	T	Packaging unit	details
	m	m	mm		
4 mm	0,59	1,58	4	8x7 m ² /ctn	(0,79x0,59m)x15 = 7m ² /Pack