


# NOMA® PARKETT GREEN ROLL 2,2mm

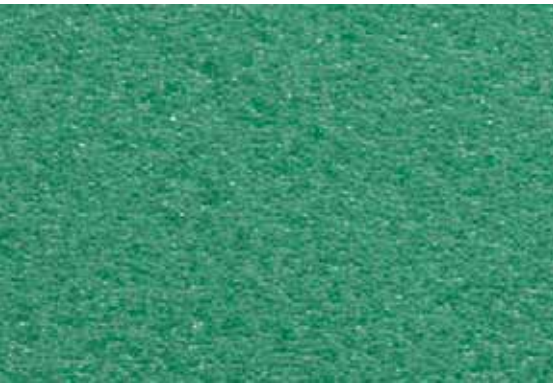

High insulating extruded polystyrene foam. NOMA® PARKETT GREEN ROLL ideally suits for an application with floating parquet floors, click system parquet and laminate flooring.

## Product features

- Elastified for the reducing of impact noise
- Improves walking comfort
- Odour- and rot-free
- For indoor use only
- Simple and easy to install




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact the respective subsidiary in your country. Visit [www.nmc.eu/contact](http://www.nmc.eu/contact)

[www.nmc.eu](http://www.nmc.eu)



# NOMA® PARKETT GREEN ROLL 2,2mm

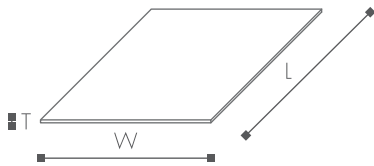

- Thickness: 2,2 mm  $\pm$  0,3 mm
- Impact sound reduction  $\Delta L_w$ : 21 dB (with laminates) according to DIN EN ISO 140-8 / 717-2
- Walking sound improvement: 21% according to IHD site norm
- Thermal resistance R at 40°C:  $\pm$  0,06 m<sup>2</sup>K/W according to DIN EN 12667
- Thermal conductivity at 40°C:  $\pm$  0,0339 W/mK according to DIN EN 12667
- Water permeability value (Sd value): > 1,1 m nach DIN 52615 / DIN EN 12086
- Compression strength:  $\pm$  10,9 t/m<sup>2</sup> according to ISO 844 (0,5 mm)
- Leveling of floor irregularities:  $\leq$  1,5 mm
- Density: 50 kg/m<sup>3</sup>  $\pm$  5 kg
- Surface mass (approx. values):  $\pm$  110 g/m<sup>2</sup>
- Application temperature range: -40 °C to +70 °C
- Fire classification: E/Efl according to DIN EN 13501-1
- Compatibility with underfloor heating (warm water system): yes
- Laminates up to 11 mm. Take producer information into account.

## Installation tips:

- The floor must be clean, dry and flat. Unroll the first length of NOMA®PARKETT GREEN ROLL on the floor and cut it to the size required using a cutter. Unroll on the floor and cut the second length, which you lay edge-to-edge against the first.
- To guarantee a good result, it is essential to attach the layers to each other, using NOMA®PARKETT ADHESIVE & FIX (adhesive tape covered with aluminium for underlay). Where it meets the wall, stick part of the adhesive tape on the NOMA®PARKETT GREEN ROLL and the other against the adjacent wall. Repeat steps and then fit the floor.
- Our recommendation : Avoid walking on the underlayer. In case of underfloor heating system, consider the total thermal resistance (value of the underlayer + flooring).

## Range of products

Type	W m	L m	T mm	Packaging unit
2,2 mm	1	15	2,2	18x15 m <sup>2</sup> /palet
2,2 mm	1	15	2,2	5x15 m <sup>2</sup> /ctn