


NOMA® PARKETT GREEN TILES 5 mm

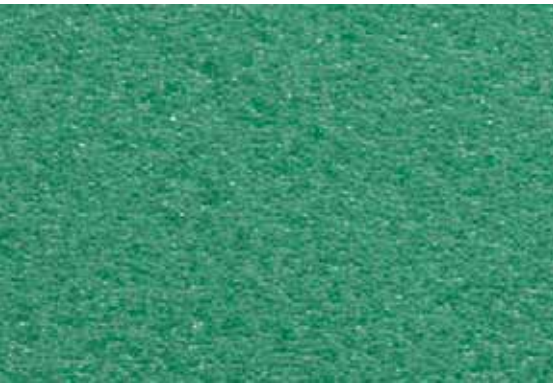

High insulating, extruded polystyrene foam, grooved.
NOMA® PARKETT GREEN TILES ideally suits for an application with floating parquet floors, click system parquet and laminate flooring. Not suitable for use with underfloor heating systems.

Product features

- Efficient reduction of impact sound and mechanical vibration
- Improves the walking sound reflection and reduces the transmission of impact noise
- Offers a high compression strength and dimensional stability
- Offers a high thermal resistance
- Not suitable for use with underfloor heating systems
- For indoor use only
- Simple and quick to fit




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact
the respective subsidiary in your country.
Visit www.nmc.eu/contact

www.nmc.eu



NOMA® PARKETT GREEN TILES 5 mm

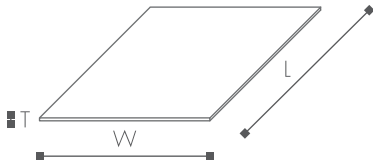

- Thickness: 5 mm \pm 0,5 mm
- Impact sound reduction ΔL_w :
20 dB (with laminates) according to DIN EN ISO 140-8 / 717-2
25 dB (with tie beam) according to DIN EN ISO 140-8 / 717-2
- Walking sound improvement: 23% according to IHD site norm
- Thermal resistance R at 40°C: \pm 0,14 m²K/W according to DIN EN 12667
- Thermal conductivity at 40°C: \pm 0,0371 W/mK according to DIN EN 12667
- Water permeability value (Sd value): > 2,5 m according to DIN 52615 / DIN EN 12086
- Compression strength: \pm 10,5 t/m² according to ISO 844 (0,5 mm)
- Leveling of floor irregularities: \leq 3 mm
- Density: 33 kg/m³ \pm 4 kg
- Surface mass (approx. values): \pm 165 g/m²
- Application temperature range: -40 °C to +70 °C
- Fire classification: E/Efl according to DIN EN 13501-1
- Compatibility with underfloor heating (warm water system): no

Installation tips:

- The floor must be clean, dry and even. If there is any serious dampness, we recommend the additional fitting of a PE vapour-trap film (such as NOMA®PARKETT UNIVERSAL) meeting a Sd-value of >100 m. Lay the sheets of NOMA®PARKETT GREEN TILES edge to edge (grooved side downwards).
- Cut the sheets to the desired size using a cutter. To guarantee a good result, it is essential to attach the layers to each other, using NOMA®PARKETT ADHESIVE & FIX (adhesive tape covered with aluminium for underlay). Where it meets the wall, stick part of the adhesive tape on the NOMA®PARKETT GREEN TILES and the other against the adjacent wall. Repeat steps. Then lay the floor.

Range of products

Type	W m	L m	T mm	Packaging unit	details
5 mm	0,625	1,60	5	10x5 m ² /ctn	1600x625mm gefaltet auf 800x625mm
5 mm	0,625	1,60	5	40x5 m ² /palet	1600x625mm gefaltet auf 800x625mm