


# NOMA® PARKETT UNIVERSAL ROLL 0,12mm

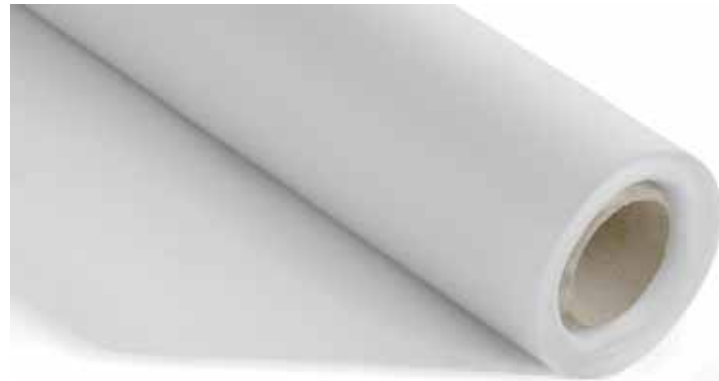

Multilayer special film manufactured from high-quality raw materials. NOMA® PARKETT UNIVERSAL ROLL suited for laying click system laminate flooring as well as floating parquet floors, especially if there is still humidity in the floor. The 3-layer film offers outstanding protection against rising humidity.

## Product features

- Protects against rising damp
- High resistance to water vapour diffusion
- High water vapour blocking action
- High safety
- High tensile strength
- Manufactured from high-quality raw materials
- Odour- and rot-free
- Recyclable




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact  
the respective subsidiary in your country.  
Visit [www.nmc.eu/contact](http://www.nmc.eu/contact)

[www.nmc.eu](http://www.nmc.eu)



# NOMA® PARKETT UNIVERSAL ROLL 0,12mm

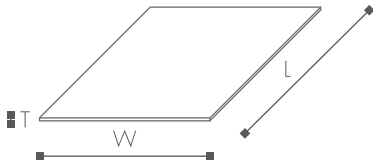

- Thickness (nominal):  $\pm 120 \mu\text{m}$  nach DIN EN 2286-3
- Water permeability value (Sd value):  $\geq 150 \text{ m}$
- Density:  $\pm 830 \text{ kg/m}^3$  nach DIN EN ISO 845
- Surface mass:  $\pm 100 \text{ g/m}^2$
- Application temperature range:  $-40 \text{ C}^\circ$  to  $+70 \text{ C}^\circ$
- Fire classification: B2 according to DIN 4102

## Installation tips:

- Lay out the sheet and pull die edges 15cm upwards the wall.
- Overlap the joints and fix them with water vapour resistant tape (NOMA® PARKETT ADHESIVE & FIX).
- Lay the floor and cut overlapping sheet next to the wall

## Range of products

Type	W	L	T	Packaging unit	details
	m	m	mm		
0,12 mm	2	15	0,12	6x30 m <sup>2</sup> /ctn	15x2m, folded 15x1m