

NOMA® PARKETT WHITE ROLL 4mm



Extruded polyethylene foam. Well suited for floating parquet, cork and click laminate floors with key and slot system in areas with low to normal traffic.

Product features

- Reduced impact noise
- Higher walking comfort
- Elastic




NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact
the respective subsidiary in your country.
Visit www.nmc.eu/contact

www.nmc.eu



NOMA® PARKETT WHITE ROLL 4mm

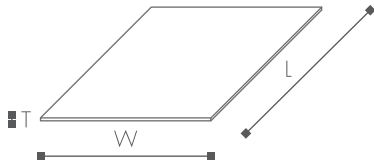

- Thickness: 4 mm +/- 0,4 mm
- Impact sound reduction ΔL_w : 18 dB (with laminate) acc. to DIN EN ISO 140-8 / 7172
- Thermal resistance R at 40°C: $\pm 0,089 \text{ m}^2\text{W/K}$ acc. to DIN EN 12667
- Thermal conductivity at 40°C: $\pm 0,045 \text{ W/mK}$
- Water permeability value (Sd value): $> 10 \text{ m}$ acc. to DIN 52615 / DIN EN 12086
- Compression strength: $\pm 2 \text{ t/m}^2$ acc. to ISO 844 (0,5 mm)
- Continuous compressive stress: $\leq 2,0 \text{ kN/m}^2$ acc. to DIN EN 1606
- Leveling of floor irregularities: $\leq 2 \text{ mm}$
- Density: $\pm 20 \text{ kg/m}^3$ acc. to DIN EN ISO 845
- Surface mass (approx. values): $\pm 80 \text{ g/m}^2$
- Application temperature range: $-40 \text{ }^\circ\text{C}$ to $+70 \text{ }^\circ\text{C}$
- Fire classification: B2 acc. to DIN 4102
- Compatibility with underfloor heating (warm water system): no

Installation tips:

- The floor must be clean, dry and level. Roll the first length out on the floor and cut to the size required using a cutter. Unroll on the floor and cut a second strip which you then lay edge to edge with the first.
- To guarantee a good result, it is essential to attach the layers to each other, using NOMA®PARKETT ADHESIVE & FIX (adhesive tape covered with aluminium for underlay). Where it meets the wall, stick part of the adhesive tape on to NOMA®PARKETT WHITE ROLL and the other against the adjacent wall. Repeat as necessary and then lay the floor.

Range of products

Type	W	L	T	Packaging unit
	m	m	mm	
4 mm	1	25	4	1x25 m ² /bag