


NOMAPACK® Pad

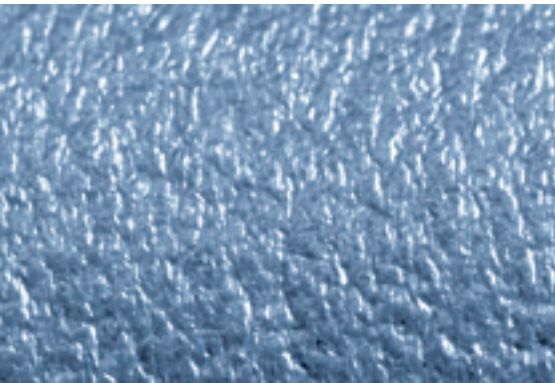

NOMAPACK® Pad, the little spacer with big effect. Available in different dimensions with permanent or residue-free removable adhesive. This is the ideal packaging spacer to separate or fix sensitive goods. The Pads are packed in preslit units, to allow to you separate the required lengths simply and cleanly.

Product features

- PE-LD foam
- CFC & HCFC free
- Density $24 \text{ kg/m}^3 \pm 2 \text{ kg/m}^3$
- Supplied as pieces in cartons
- Water absorption $< 1 - \text{vol.}\%$ after 40 days
- 100% recyclable



NMC reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC information service. Any partial reproduction or reprint shall require our explicit approval.

For further information, please contact the respective subsidiary in your country. Visit www.nmc.eu/contact

www.nmc.eu




NOMAPACK® Pad Rectangular



- Available with permanent or removable adhesive
- Multiple applications
- Good compression set


* First and last pieces might be out of tolerance!

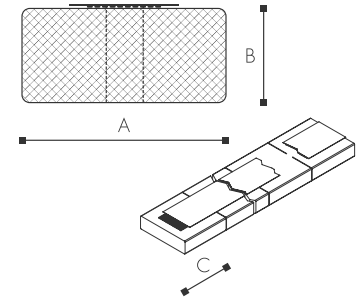

| Type | A mm | B mm | C mm | Density | Length | Bars | pcs | Item code |
|------------|-----------|----------|-----------|----------------------------|-----------------|------|-------|------------|
| 50x10 HMR | 50 +3/-3 | 10 +1/-1 | 50 +8/-8* | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 800 | 18400 | KPPPO10102 |
| 50x10 HMP | 50 +3/-3 | 10 +1/-1 | 50 +8/-8* | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 800 | 18400 | KPPPO10200 |
| 50x20 HMR | 50 +3/-3 | 20 +2/-2 | 50 +8/-8* | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 450 | 10350 | KPPPO20102 |
| 50x20 HMP | 50 +3/-3 | 20 +2/-2 | 50 +8/-8* | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 450 | 10350 | KPPPO20201 |
| 50x50 HMR | 50 +3/-3 | 50 +3/-3 | 50 +8/-8 | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 195 | 4485 | KPPPO50103 |
| 50x50 HMP | 50 +3/-3 | 50 +3/-3 | 50 +8/-8 | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 195 | 4485 | KPPPO50204 |
| 65x25 HMR | 65 +3/-3 | 25 +2/-2 | 64 +8/-8 | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 275 | 4950 | KPPPO25114 |
| 65x25 HMP | 65 +3/-3 | 25 +2/-2 | 64 +8/-8 | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 275 | 4950 | KPPPO25203 |
| 100x25 HMR | 100 +3/-3 | 25 +2/-2 | 96 +8/-8 | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 180 | 2160 | KPPPO25115 |
| 100x25 HMP | 100 +3/-3 | 25 +2/-2 | 96 +8/-8 | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 180 | 2160 | KPPPO25204 |
| 100x50 HMR | 100 +3/-3 | 50 +3/-3 | 96 +8/-8 | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 98 | 1176 | KPPPO50104 |
| 100x50 HMP | 100 +3/-3 | 50 +3/-3 | 96 +8/-8 | 24 kg/m ³ +2/-2 | 1150 mm ± 20 mm | 98 | 1176 | KPPPO50205 |

Complementary Products

NOMAPACK® U

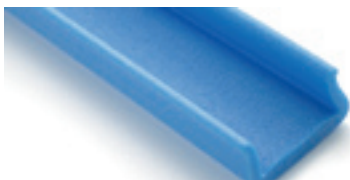


NOMAPACK® U are effective edge protection profiles for each type of corners or curves. They are available in different dimensions and densities in order to protect your products efficiently. We can also develop profiles according to customers specifications.

NOMAPACK® Glass Pad



NOMAPACK® Glass Pads keep the distance between glass plates or panels and avoid undesirable scratches and marks during all kind of transport.

NOMAPACK® System

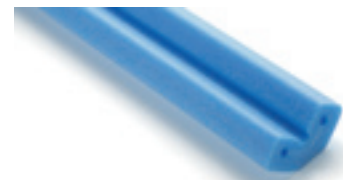

NOMAPACK® System, the efficient transport protection for sensitive goods. NOMAPACK® System provides an ideal protection against shocks and vibrations thanks to its directly extruded, specially designed L-shape with integrated holes. It can be easily transformed to obtain a packaging frame.